

NATURAL PAINT REMOVAL POULTICE


HERITAGE No1



Trowled on



Scraped off

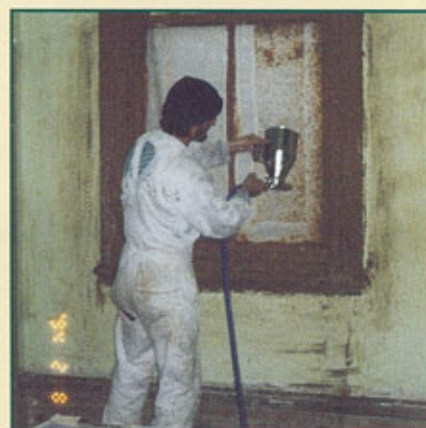

Sprayed on with
Hoppergun

- No Fumes
- No Solvents
- No Phenol
- No Methylene Chloride

Removes most paints
from most surfaces
(especially lead paint)

INSTRUCTIONS:

1. Mix poultice thoroughly before use.
2. Apply thick coat of stripper (approx. 3mm) onto surface to be stripped.
Application methods: trowled on or sprayed on with hopper gun.
3. Leave for 30 minutes to an hour, test with scraper to determine if paint is sufficiently softened. Stripping time depends on number of paint layers, age and type. The product may be left on for 24 hours or even longer. Keep poultice moist. In dry conditions cover with gladwrap, plastic sheets.
4. Remove poultice with scraper and collect waste into bucket. Wash off residue with low to high pressure water or wash and scrub clean with medium to hard brush. Removal of multi layers of paint may need repeat application.
5. We recommend all lead based paints be removed by professionals who are properly trained in the methods. Disposal must be in accordance with State regulations.



Cover-up during paint removal.



Finished Sandstone Stripping



Paint removed & washed Veranda brick work



Paint stripping metal ceiling



"Heritage No 1" sprayed-on timber door frame.



Finished timber stripping



Washing & rinsing with turbo tool.

HEIM SURFACE TECHNOLOGIES.

HERITAGE No.1

Division's of Let's Clean Pty. Ltd. ACN 003272811 ABN 68 003 272 811
website: www.letsclean.com.au

SYDNEY

3/93 Greenwich Road, Greenwich 2065
or PO Box 36 Artarmon NSW 2064
Australia

Ph: 02 9438 2047
Fax: 02 9906 3328

Member of ●Masters Painters Australia